



 神興科技股份有限公司
CKT TEK CO., LTD.



Professional Plastic & Rubber Solution Provider
You Can Expect More

神興科技股份有限公司

CKT TEK CO., LTD.
BOOKING BYWAY DEVELOPMENT INC.

新加坡中環區中山路2段346號21-1樓
No. 21-1, Lane 346, Sec. 2, Chung-Suan Rd.,
Chung Ho Dist., New Taipei City 226, Taiwan,
R.O.C.
TEL: +886-2-2240-0607
FAX: +886-2-2240-0004
Web site: <http://www.ckt.com.tw>
E-Mail: sales_tel@ckt.com.tw

吉麟科技股份有限公司

GiLipin Technology Co., Ltd.
Web site: <http://www.gilipin.com.tw>



CKT China Manufacturing Centre

東莞群森電子科技有限公司

DongGuan QunLin Electronics Tech Co., Ltd.

廣東省東莞市橫瀝鎮石滘民豐工業區33樓
(郵編: 523440)
No.33 Building Private Industrial
Region Of Shi Yang, Hengli Town, Dongguan
Guangdong, China
Postal Code: 523440
TEL: +86-769-83395575
FAX: +86-769-83395578
Sales Contact: sales_dg@ckt.com.tw

神興橡膠科技(蘇州工業園)有限公司

CKT Rubber (Suzhou Industrial Park) Co., Ltd.

蘇州市吳中區湖高蘇聯路298-8號
(郵編: 215100)
No.298-8(Lany) Road,Lushi Town, Wuzhong
District,Suzhou City
Postal Code: 215100
TEL: +86-512-88079888
FAX: +86-512-82718888
Sales Contact: sales_sj@ckt.com.tw

CKT TEK CO., LTD.



Zebra MInter-Connectors




Rubber Rollers



Rubber Metal Bond



Membrane Switch & Overlay

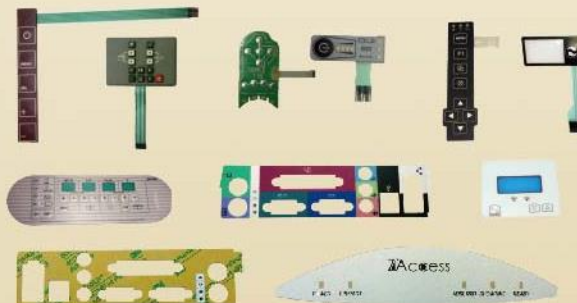



Keypads



House Ware




Plastic Parts



Badge Holders



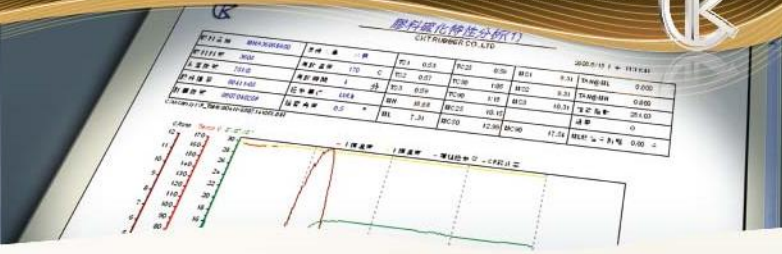

Vacuum Cups



O-Rings & Rubber Foot



Computer Peripherals



Digital Accessories





Automotive

Application Parts :

Rubber mat, Rubber boots, Vacuum cups, Control button/pad, O-Ring, Oil Seal, Antenna cover, Rubber grommet ...



Healthcare & Food grade products

Application Parts :

Components of diabetes treatment; aphygnomanometer, respiratory therapy mask, baby teether, baby silicone toothbrush, silicone bib....

Wide Range Material

Material : NR / NBR Hardness : 20-80	Material : EPDM Hardness : 20-80	Material : CR Hardness : 20-80	Material : Silicone Rubber Hardness : 20-80 shA
Material : High Tensile Strength Silicone Rubber Hardness : 20-80 shA	Material : FDA Grade Silicone Rubber Hardness : 20-80 shA	Material : High Consistency Rubber Hardness : 20-80 shA Flammability Rating : UL-94-V0 - UL-94-V2	Material : Conductive Rubber Hardness : 20-80 shA Resistance (Ω) : 1-100 (Ω)